

Crimp System Tool PEW 12



Art. No. 624 000 3




Art. No. 624 000 6

- Special tool for crimping virtually all crimped connections with conductor cross-sections from 0.08 – 95 mm².
- Ensures exact, solder-free electrical connections
- Parallel jaw closing
- Excellent leverage transfer
- Good handling through ergonomic centre of gravity
- One- or two-handed operation
- Many different combination possibilities







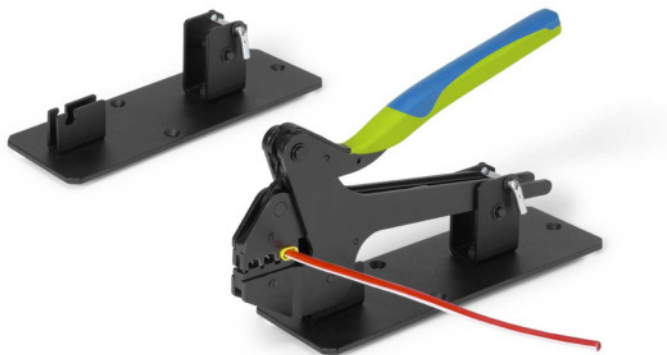

Art. No.	Finish	Length	Weight
624 000 3	Tool with burnished finish, 2C grips, without die set	200	560
624 000 6	Tool with chrome finish, 2C grips, without die set	200	560















Art. No.	Finish	Length	Weight
624 101 3	Tool with burnished finish in plastic case, without die set		
624 101 6	Tool with chrome finish in plastic case, without die set		
624 40098 3	Tabletop mount for PEW 12	190	360

[-> Dies and locators for Crimp-System Tool PEW 12](#)



Art. No. 624 40098 3

Art. No.	Description	Connectors	Range of application	Profile
624 032 3	PEW 12 burnished with die set		non-insulated terminals	
624 032 6	PEW 12 chrome plated with die set		Capacity (mm ²)	
624 032 3	Die set		0,5-1,0 / 1,5-2,5 / 4,0-6,0 / 10,0	
0				
624 033 3	PEW 12 burnished with die set		non-insulated terminals	
624 033 6	PEW 12 chrome plated with die set		Capacity (mm ²)	
624 033 3	Die set		16 / 25	
0				
624 060 3	PEW 12 burnished with die set		insulated terminals	
624 060 6	PEW 12 chrome plated with die set		Capacity (mm ²)	
624 060 3	Die set		0,5-1,0 / 1,5-2,5 / 4,0-6,0	
0				
624 060-3	PEW 12 burnished with die set		insulated terminals	
3	PEW 12 chrome plated with die set		Capacity (mm ²)	
624 060-3	Die set		0,5-1,0 / 1,5-2,5 / 4,0-6,0	
6				
624 060-3				

Art. No.	Description	Connectors	Range of application	Profile
3 0				
624 063 3	PEW 12 burnished with die set		insulated terminals	
624 063 6	PEW 12 chrome plated with die set		Capacity (mm ²)	
624 063 3 0	Die set		10 / 16	
624 380 3 23	PEW 12 burnished with die set		non-insulated terminals	
624 380 3 0	and locator		Capacity	
624 380 0 023	Die set		AWG 26-20 / AWG 20-16 / AWG 16-12	
624 380 0 023	Locator			
624 691 3 125	PEW 12 burnished with die set		insulated terminals	
624 691 6 125	PEW 12 chrome plated with die set		Capacity (mm ²)	
624 691 3 125	PEW 12 burnished with die set and locator		0,5-1,0 / 1,5-2,5 / 4,0-6,0	
624 691 3 0	PEW 12 chrome plated with die set and locator			
624 691 0 0125	Die set			
624 691 0 0125	Locator			
624 1071 3 0	PEW 12 burnished with die set		non-insulated terminals und Verbinder	
624 1071 6 0	PEW 12 chrome plated with die set		Capacity (mm ²)	
624 1071 3 0	Die set		0,5-1,5 / 1,5-2,5	
			4,0-6,0 / 6,0-10,0	
			Rolled and stamped contacts	
624 053 3 0	PEW 12 burnished with die set		Capacity (mm ²)	
624 053 6 0	PEW 12 chrome plated with die set		0,14-0,25 / 0,3-0,5 / 0,75-1,5	
624 053 3 0	Die set			
624 667 3 1	PEW 12 burnished with die set		Rolled and stamped contacts	
624 667 3 0	PEW 12 burnished with die set and locator		Capacity (mm ²)	
624 667 3 0	Die set		0,03-0,09 / 0,2-0,56 / 0,08-0,2	
624 667 0 01	Locator			
		D-Sub		